

Thermo Scientific™ Pico and
Fresco Microcentrifuge Series

Fits in.
Stands out.

Thermo Scientific™ Pico and Fresco Microcentrifuges

Fits in.

- ▶ To your space, with compact footprints
- ▶ To your micro-volume protocols:
 - Choose from 7 optional rotors to find the ideal fit for your application
 - Two speed options, and both ventilated and refrigerated models available

Stands out.

- ▶ Simplify operation with intuitive controls, easy-to-read displays and fast one-click centrifuge lid closure
- ▶ Fast acceleration and deceleration, and outstanding corrosion resistance with lightweight engineered polymer rotors
- ▶ Ergonomic one-click rotor opening and closing, as well as transparent design for added safety with certified¹ Thermo Scientific™ ClickSeal™ biocontainment lids
- ▶ Eliminate the need for adapters with unique dual row rotor




¹Biocontainment certification by Public Health England, Porton Down, UK on all rotors with ClickSeal biocontainment lids, except for the 10 x 5 mL rotor.



Watch them in action at
www.thermoscientific.com/microcentrifuge



Large, bright and easy-to-read display

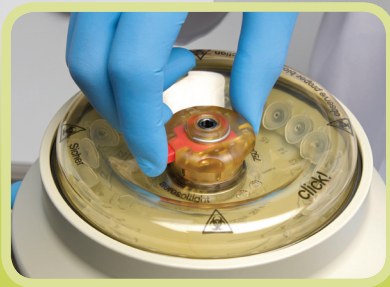

Transparent ClickSeal biocontainment lids



Fast one-click centrifuge lid closure

▶ safe, powerful, versatile, easy-to-use

The **Thermo Scientific™ Pico™ and Fresco™ 17 microcentrifuges** are excellent for routine laboratory work, while the **Pico and Fresco 21 microcentrifuges** are ideal for high-end research applications, reducing spin times by up to 20%.²

Perform both complex and simple protocols:

- ▶ The standard rotor runs 24 tubes in a single row with equalized g-forces for reproducibility, from 1.5 to 2.0 mL tubes to mini-preps and spin columns
- ▶ Eliminate the need for adapters with the unique dual row rotor, which holds 18 tubes of both 1.5/2.0 mL and 0.5 mL in the same run
- ▶ Maximize your micro-volume capacity with the new 10 x 5 mL rotor with ClickSeal biocontainment lid, separating samples at g-force up to 20,326 x g
- ▶ Wide variety of rotors support 0.5 mL microtubes, 0.2 mL PCR tubes and hematocrit capillary tubes

Save time with fast sample processing

- ▶ Lightweight rotors are designed to provide acceleration up to 21,100 xg in 12 seconds
- ▶ Refrigerated versions offer cooling from room temperature to set temperature in just 9 minutes
- ▶ Fast one-click centrifuge lid closure

Ideal for everyday laboratory use:

- ▶ High performance engineered polymer rotors are designed for outstanding chemical resistance to minimize corrosion from aggressive reagents
- ▶ ClickSeal biocontainment lids shorten retrieval time with one-click opening, compared to screw-on lids
- ▶ Transparent PPSU rotor lids enable viewing for added safety and convenience
- ▶ Quiet performance (<56 dBA ventilated and <50 dBA refrigerated) promotes a safe and reduced stress environment
- ▶ Conforms to the latest clinical and safety standards, including 98/79/EC In Vitro Diagnostic Directive

²Compared to Pico and Fresco 17 microcentrifuges.

Thermo Scientific Microcentrifuge Rotors and Accessories

| | Description | Rotor Capacity | Max Tube Dimensions | Max Speed (rpm) | Max RCF (xg) | Cat. No. |
|--|---|-----------------------|---------------------|-----------------|--------------|----------|
|  | 24 x 1.5/2.0 mL rotor with ClickSeal biocontainment lid  Standard rotor with exceptional versatility – 24 tubes per run from basic microtube processing to mini-preps and spin columns and additional flexibility with available adapters. | 24 x 1.5/2.0 | 11 x 50 | 14,800 | 21,100 | 75003424 |
| | 0.5/0.6 mL microliter tube adapters, pack of 24 | 24 x 0.5/0.6 | 7 x 32 | 14,800 | 21,100 | 76003252 |
| | 0.25/0.4 mL microliter tube adapters, pack of 24 | 24 x 0.25/0.4 | 6 x 24 | 14,800 | 21,100 | 76003251 |
| | 0.2 mL PCR tube adapters, pack of 24 | 24 x 0.2 | 6 x 24 | 14,800 | 21,100 | 76003250 |
|  | Dual Row 18 x 2.0/0.5mL rotor with screw-on lid Accommodate two different size tubes in one rotor without using adapters. | 18 x 2.0/ 18 x 0.5 | 11 x 50 | 14,800 | 20,800 | 75003418 |
|  | 36 x 0.5 mL rotor with screw-on lid Increase throughput for smaller microtubes. | 36 x 0.5 | 7 x 32 | 14,800 | 19,300 | 75003436 |
|  | 10 x 5 mL rotor with ClickSeal biocontainment lid³ Increase your nucleic acid sample separation. | 10 x 5 | 17 x 62 | 14,800 | 20,326 | 75003465 |
|  | PCR 8 x 8 rotor with screw-on lid Centrifuge up to 8 PCR strips at one time. | 64 x 0.2 | 6 x 24 | 14,800 | 17,100 | 75003489 |
|  | PCR 4 x 8 rotor with ClickSeal biocontainment lid  Process up to 4 PCR strips with certified ¹ sample protection. | 32 x 0.2 | 6 x 24 | 14,800 | 16,200 | 75003440 |
|  | Hematocrit rotor Achieve fast capillary separations with included linear scale to read results. | 24 Capillaries | | 14,800 | 16,800 | 75003473 |
| | Capillaries, pack of 100 (included with hematocrit rotor #75003473) | 24 Capillaries | | | | 76000923 |
| | Linear scale reading graph (included with hematocrit rotor #75003473) | | | | | 76000938 |

| Replacement Lids | Cat. No. |
|---|----------|
| ClickSeal biocontainment lid* | 75003410 |
| Replacement O-ring set for ClickSeal lid – 75003410 | 75003405 |
| Screw-on lid | 75003406 |

¹Biocontainment certification by Public Health England, Porton Down, UK.

³Tested for aerosol-tight seal.

*Used with rotors 75003424, 75003440 and 75003465

Thermo Scientific Pico and Fresco Microcentrifuges



| Specifications | Pico and Fresco 17 | Pico and Fresco 21 |
|--|--|--------------------|
| Max RCF | 17,000 xg | 21,100 xg |
| Max Speed | 13,300 rpm | 14,800 rpm |
| Max Noise Level | 56 dBA (ventilated); 50 dBA (refrigerated) | |
| Acceleration/Deceleration Rates | 11/12 seconds (ventilated); 10/12 seconds (refrigerated) | |
| Time Set Range | 1 min - 99 min; 1 min increments + HOLD mode | |
| Temperature Range⁴ | Set from -9 °C to +40 °C per 1 °C increment | |
| Certifications | CSA certified, CE marked, IVD compliant, Certified biocontainment ¹ | |
| Technical Standards | IEC 61010-1, IEC 61010-2, IEC 61010-020 | |
| Dimensions, H x W x D | | |
| Pico 17/21 centrifuges | 225 x 243 x 352 mm (8.86 x 9.56 x 13.8 in) | |
| Fresco 17/21 centrifuges | 330 x 295 x 445 mm (12.9 x 11.6 x 17.5 in) | |

¹Biocontainment certification by Public Health England, Porton Down, UK.

⁴Fresco centrifuges only.

| Ordering Information | 230V 50/60 Hz | | 120V 60 Hz | |
|--|---------------|----------|------------|----------|
| | Pico 17 | | Fresco 17 | |
| Thermo Scientific microcentrifuge , includes 24 x 1.5/2.0 mL rotor with ClickSeal biocontainment lid | 75002410 | 75002411 | 75002420 | 75002421 |
| Thermo Scientific microcentrifuge , includes hematocrit rotor | 75002491 | 75002492 | N/A | N/A |
| Thermo Scientific microcentrifuge , includes dual row 18 x 2.0/0.5 mL rotor with screw-on lid | 75002414 | 75002401 | 75002423 | 75002402 |
| | Pico 21 | | Fresco 21 | |
| Thermo Scientific microcentrifuge , includes 24 x 1.5/2.0 mL rotor with ClickSeal biocontainment lid | 75002415 | 75002416 | 75002425 | 75002426 |
| Thermo Scientific microcentrifuge , includes dual row 18 x 2.0/0.5 mL rotor with screw-on lid | 75002553 | 75002554 | 75002555 | 75002556 |
| Thermo Scientific microcentrifuge , includes 24 x 1.5/2.0 mL rotor with ClickSeal biocontainment lid and dual row 18 x 2.0/0.5 mL rotor with screw-on lid | 75002475 | 75002477 | 75002476 | 75002478 |

Support your micro-volume separation needs

with a complete family of Thermo Scientific microcentrifuges that fits in and stands out.



Thermo Scientific™ Microcentrifuges

mySPIN™ mini centrifuge series

- ▶ Enjoy convenience at your personal workstation with our most compact centrifuges
- ▶ Designed for quick and pulse spins
- ▶ Ideal for PCR, microfilter cell separation, and HPLC protocols
- ▶ Spin 6 x 2 mL at 2,000 x g or 12 x 2 mL at up to 9,800 x g

Pico and Fresco 17 and 21 microcentrifuge series

- ▶ Perform routine separations with our standard microcentrifuges
- ▶ Fast acceleration and deceleration, and outstanding corrosion resistance with lightweight engineered polymer rotors
- ▶ Maximize your micro-volume separation capabilities with the 10 x 5 mL rotor with ClickSeal biocontainment lid
- ▶ Spin 24 x 2 mL at up to 21,100 x g

Megafuge™ 8 small benchtop centrifuge series

- ▶ More than a microcentrifuge—benefit from increased flexibility in your multi-discipline lab
- ▶ Easily change rotors with innovative Thermo Scientific™ Auto-Lock™ rotor exchange
- ▶ Choose from 13 optional rotors, including 30 x 2 mL fixed angle rotor and 4 x 145 mL swinging bucket rotor
- ▶ Spin 24 x 2 mL at up to 30,279 x g

www.thermoscientific.com/microcentrifuge

© 2015 Thermo Fisher Scientific Inc. All rights reserved.

All other trademarks are the property of Thermo Fisher Scientific Inc. and its subsidiaries. Specifications, terms and pricing are subject to change. Not all products are available in all countries. Please consult your local sales representative for details.

Australia +61 39757 4300
Austria +43 1 801 40 0
Belgium +32 53 73 42 41
China +800 810 5118 or
+400 650 5118
France +33 2 2803 2180
Germany national toll free 0800 1 536 376
Germany international +49 6184 90 6000

India toll free 1800 22 8374
India +91 22 6716 2200
Italy +39 02 95059 552
Japan +81 3 5826 1616
Netherlands +31 76 579 55 55
New Zealand +64 9 980 6700
Nordic/Baltic/CIS countries
+358 10 329 2200

Russia +7 812 703 42 15
Spain/Portugal +34 93 223 09 18
Switzerland +41 44 454 12 22
UK/Ireland +44 870 609 9203
USA/Canada +1 866 984 3766

Other Asian countries +852 2885 4613
Countries not listed +49 6184 90 6000

Thermo
SCIENTIFIC

A Thermo Fisher Scientific Brand